






















# Suspended Platform Systems

Our Suspended Platform System is modular and consists of three main parts: a platform, a hoist and an outrigger. Clever product innovations make this system lightweight, user-friendly, easy to transport and above all safe.

## Key features

- ✓ No tools needed
- ✓ Innovative twist & lock connection frame
- ✓ Few, lightweight parts < 50 kg
- ✓ XSClimber: heavy duty hoist
- ✓ Shock absorbing outrigger
- ✓ Complies with EN1808:2015

## LOADING CAPACITY:


Configuration	Self-weight (kg)	Rated load (kg)*	
		XSClimber	
		400	500
2 m 	228	572	772
3 m 	250	551	751
3 m  optional	265	535	735
4 m 	292	508	708
4 m  optional	289	511	711
5 m 	328	472	672
5 m  optional	316	484	684
6 m 	336	464	664
6 m  optional	355	445	645
7 m 	379	421	621
7 m  optional	394	406	606
8 m 	422	378	578
8 m  optional	402	398	598
9 m 	422	378	578
9 m  optional	457	343	543
10 m 	465	335	535
10 m  optional	484	316	516
11 m 	501	300	500
11 m  optional	489	312	512
12 m 	508	292	492
12 m  optional	547	253	453

\*Based on complete a platform with 2 XSClimbers.



## Platforms

- ✓ Twist & lock connection
- ✓ No tools needed
- ✓ Non-slip, high grade composite floors
- ✓ Foldable frames, less storage space
- ✓ High grade aluminum extrusion profiles with integrated cable slots
- ✓ 3 module lengths: 1, 2 and 3 meters

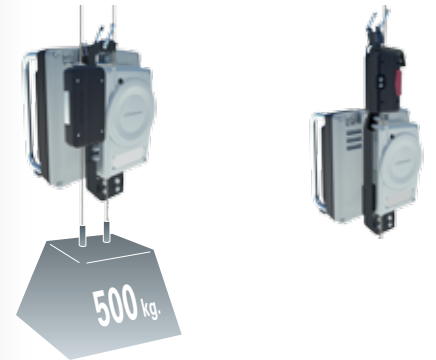

## XSClimbers

- ✓ Working Load Limit of 500 kg each
- ✓ Four-point-access for easy maintenance
- ✓ Individual control panel
- ✓ Single Printed Circuit Board for all phases, voltages and frequencies
- ✓ Digital running hours counter
- ✓ Water and dust resistant housing
- ✓ Compact design
- ✓ Suitable for all types of secondary brakes



## Outriggers

- ✓ 800 kg Working Load Limit each
- ✓ High-grade aluminum alloy
- ✓ Integrated shock absorber
- ✓ Lockable 23 kg counterweights
- ✓ Outreach between 90 - 220 cm
- ✓ Inner beam length between 450 - 550 cm
- ✓ Adjustable height